PRODUCT DATA SHEET

Lightning protection systems


Isolated LPS

Code: 6070002-71

Description: Mast insulator, code 6070002-71

Application

Mast insulator for supporting air termination rod Ø15x300 mm or Ø15x600 mm on metallic mast.

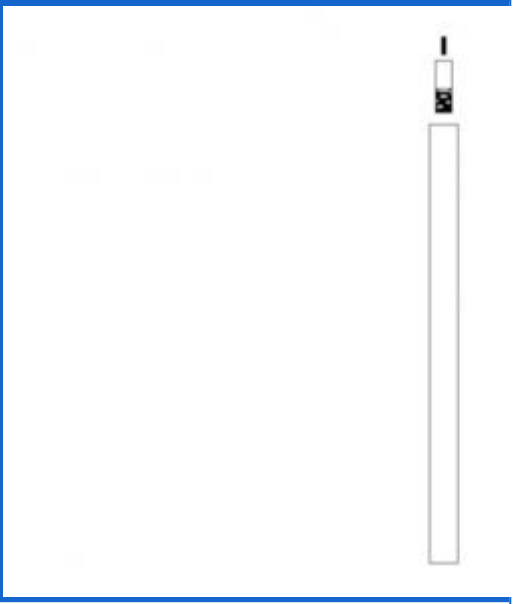

Technical characteristics - Installation instructions

Material	Acetal.
Shape	Tube.
Dimensions	Ø50x1000 mm with both ends internal threaded.
Wall thickness	15 mm.
Effective length, leff	1000 mm.
Connection to air termination rod	Through aluminium connection point with M8 thread at the top, for the air termination rod connection through suitable dowel.
Connection to mast	Through internal thread at the bottom of the insulator.
Can be connected with	Al, Cu, Copper Alloy (Cu–A), Cu/eNi, Cu/eSn, Stainless Steel (SSt), St/tZn.

Manufacturing Quality Control

- ISO 9001
- ISO 14001
- ISO 45001

Country of Origin

Greece

Unit: piece

We reserve the right to introduce changes in the component due to technical evolution.

90 Tatoiou STR, GR 144 52 Metamorphosis ☎ +30 210 2845400 www.elemko.gr elemko@elemko.gr