

PRODUCT DATA SHEET

Earthing components

Connection components for earth conductors

Lightning protection systems

Connection components for LPS conductors

Code: 6221837-71


Description: Cu conductor connection clamp, code: 6221837

Application

Clamp, for connecting solid round or stranded conductors. Used in air termination system, down conductor system, earthing system.

Classification as per IEC EN 62561

- Heavy duty (H – 100 kA)
- General use
- Intended to withstand a static mechanical load
- Non-permanent connection

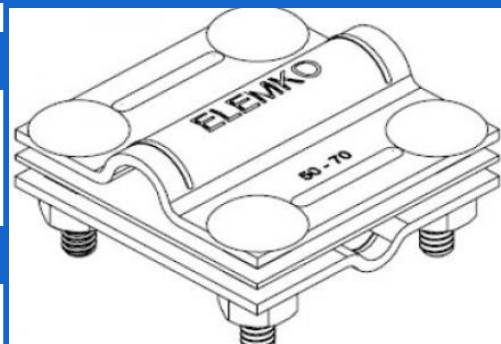

Technical characteristics -- Installation instructions

Material	Copper (Cu)
Description	Is consisted of two external plates with dimensions 50x50 mm and one intermediate plate.
Bolts / nuts	M6x25 mm, V2A stainless steel carriage bolts. M6 V2A stainless steel nuts.
Conductor's dimensions	50-70 mm ² / 16-35 mm ²
Connection arrangements	Cross (B1). Parallel (B2).
Installation	Above ground, buried in ground, embedded in concrete.
Can be connected above ground with	Cu, Cu/eSn, Stainless Steel (SSt), St/eCu
Can be connected buried in ground with	Cu, Cu/eSn, Stainless Steel (SSt), St/eCu
Can be connected in concrete with	Cu, Cu/eSn, Stainless Steel (SSt), St/eCu, St/tZn

Tightening torque	9 Nm
-------------------	------

Testing as per IEC EN 62561

The component has successfully passed the testing requirements of standard IEC EN 62561-1 "Lightning protection system components (LPSC) - Part 1 : Requirements for connection components".

Test report No **30978** by accredited laboratory as per ISO 17025

Manufacturing Quality Control

Manufacturing quality control according to standard ISO 9001

Country of Origin

Greece

Unit: piece / Package: 25 pieces