

1

2


3

4

5

6

A

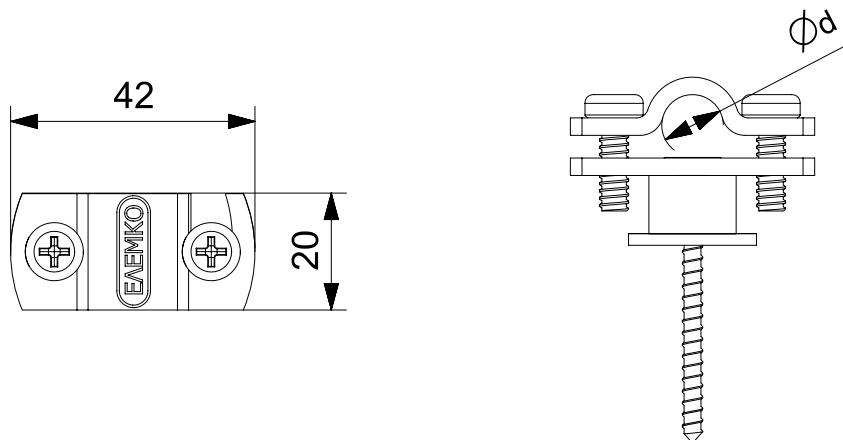

Description


Conductor fastener, tested according to IEC EN 62561-4, for use in air termination system, down conductor system. Suitable for fastening solid round or stranded conductor on brick or concrete walls or on metallic surfaces. It is equipped with a wood fixing screw and a plastic spacer formed to receive PVC sealing washer (not included). The conductor's tightening is achieved by two stainless steel (V2A) screws M6x16 mm.

B

C

D

Typical application

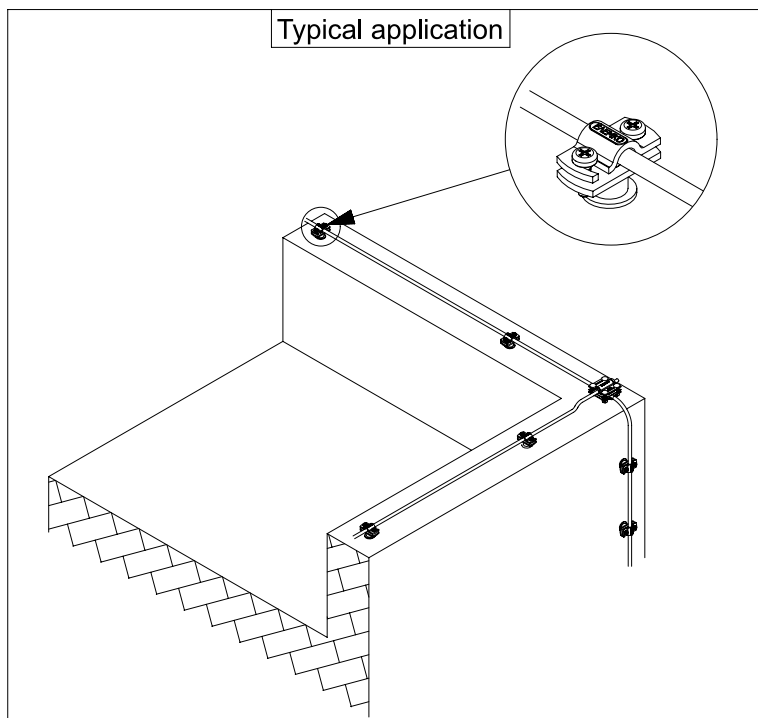

All dimensions in mm

1

2

3

4

5

A4

| Description | Raw material | ϕd | Item code | Optional conductor (Round) |
|--|--------------|----------|-----------|----------------------------|
| Conductor's fastener with plastic spacer | St/tZn | 6 | 61 01 107 | 64 22 006 |
| Conductor's fastener with plastic spacer | St/tZn | 8 - 10 | 61 01 102 | 64 00 108 |
| Conductor's fastener with plastic spacer | Al | 8 - 10 | 61 41 102 | 64 40 008 |
| Conductor's fastener with plastic spacer | Cu | 6 | 61 21 105 | 64 20 006 |
| Conductor's fastener with plastic spacer | Cu | 8 - 10 | 61 21 102 | 64 20 008 |
| Conductor's fastener with plastic spacer | SSt/V2A | 8 - 10 | 61 61 101 | 64 60 010 |



Title:

Conductor fastener on
brick or concrete walls

FIRST ISSUED June 2016

DRAWN BY Dionysopoulos G.

CHECKED BY Kokkinos N.

APPROVED BY Kokkinos N.

SCALE None

ISSUANCE DATE July 2021

Model

61 x1 10x



SHEET 1 OF 1