

PRODUCT DATA SHEET

LIGHTNING PROTECTION AND EARTHING SYSTEM COMPONENTS

Code: 62 24 370

ed.02/2021


Description: Tape to stranded conductor copper connector

Application

Clamp, for connecting stranded conductor to tape conductor. Used in earthing system.

Classification

- Short circuit withstand capability 10 kA rms for 1s
- I_{peak} 20 kA for 0,5s

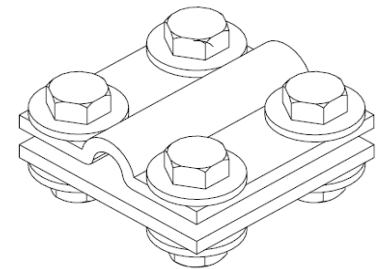

Technical characteristics

Material	Copper (Cu)
Description	Is consisted of two plates with dimensions 60x60 mm.
Bolts / nuts	M8x25 mm, V2A stainless steel hexagon head bolts M8 V2A stainless steel nuts M8 V2A stainless steel washers

Installation instructions

Conductor's dimensions	70 mm ²
Tape's dimensions	20 – 30 mm & up to 5 mm thickness
Arrangements	Cross connection Parallel connection
Can be connected with	Cu, Cu/eSn
Tightening torque	13 Nm


Manufacturing Quality Control

Manufacturing quality control according standard ISO 9001

Country of Origin

Greece

Unit: piece / Package: 20 pieces

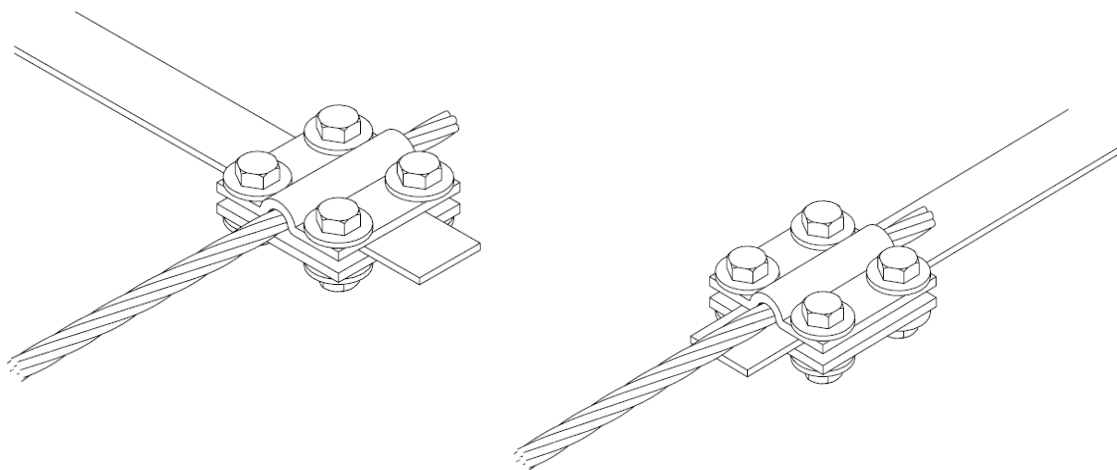

We reserve the right to introduce changes in the component due to technical evolution.