

PRODUCT DATA SHEET

LIGHTNING PROTECTION AND EARTHING SYSTEM COMPONENTS

Code: 62 24 400
ed.03/2021
Description: Tape conductor copper connector

Application

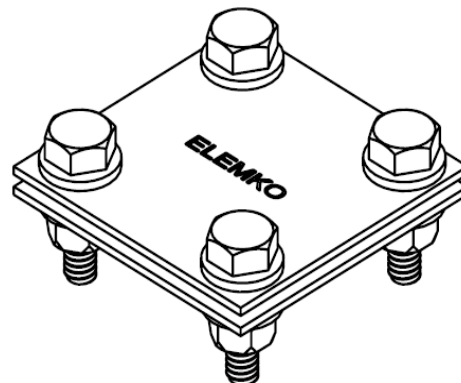
Clamp, for connecting tape conductors. Used in earthing system.

Classification

- Short circuit withstand capability 30 kA rms for 1s
- I_{peak} 75 kA for 0,5s

Technical characteristics

Material	Copper (Cu)
Description	Is consisted of two plates with dimensions 70x70 mm.
	M8x30 mm, V2A stainless steel hexagon head bolts
Bolts / nuts	M8 V2A stainless steel nuts
	M8 V2A stainless steel washers



Installation instructions

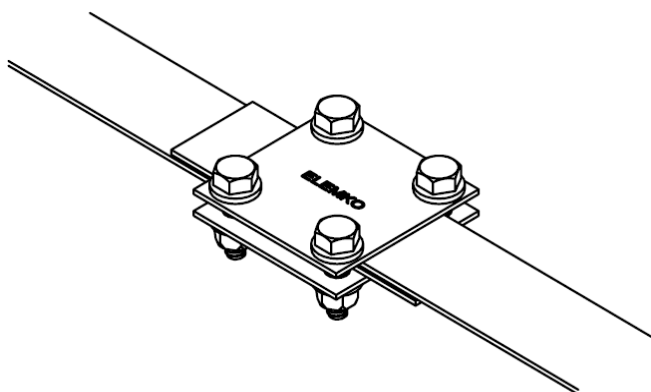
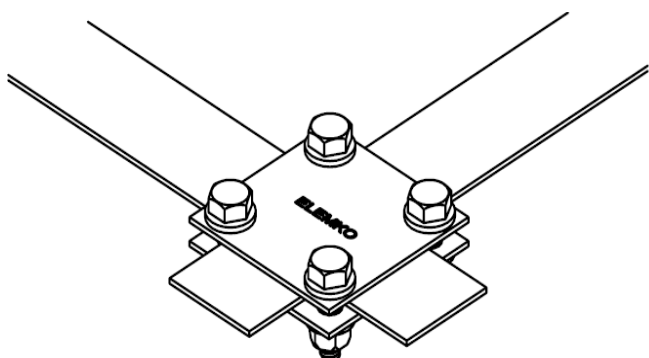
Tape's dimensions	20 – 40 mm & up to 5 mm thickness
Arrangements	Cross connection Parallel connection
Can be connected above ground with	Cu, Cu/eSn
Tightening torque	13 Nm

Manufacturing Quality Control

Manufacturing quality control according standard ISO 9001

Country of Origin

Greece

Unit: piece / Package: 20 pieces


We reserve the right to introduce changes in the component due to technical evolution.