





**Description**

Clamp, tested according to IEC 62561-1, Class "H" (Heavy duty), for connecting, solid round or stranded conductor Ø8–10mm (50–70 mm<sup>2</sup>) to tape conductor up to 40mm width .The clamp is composed out of two plates with dimensions 70x70x4 mm. The tightening is achieved by four bolts M8x30 mm and four nuts M8

**Typical application**

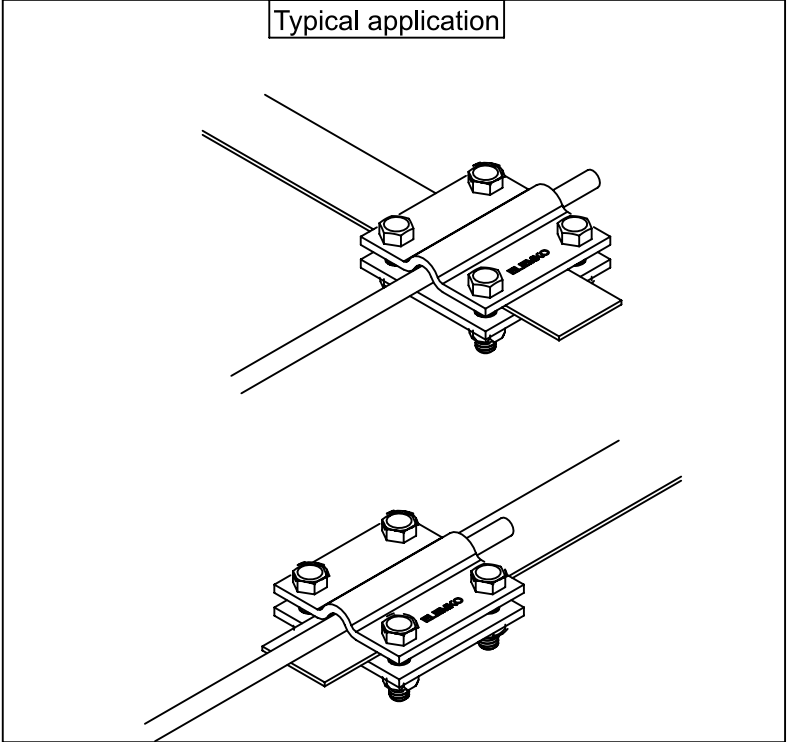

Description	Raw material	Item code	d - (WxT)	Optional conductor (Round)	Optional conductor (Tape)
Cross and 'T' connector	St/tZn	62 01 040 (St/tZn screws)	8-10 / 40x6	64 00 011	64 01 333
		62 01 041 (SSt/V2A screws)	8-10 / 40x6	64 00 118	64 01 333
	Cu	62 21 040 (SSt/V2A screws)	8-10 / 40x6	64 20 008	64 20 330
		62 21 041 (SSt/V2A screws)	8-10 / 40x6	64 20 008	64 22 330

		Title:	
		Cross and 'T' connector	
FIRST ISSUED	June 2016	Model	
DRAWN BY	Dionysopoulos G.		
CHECKED BY	Kokkinos N.	62 xx 04x	
APPROVED BY	Kokkinos N.	 <a href="http://www.elemko.gr">www.elemko.gr</a>	 <a href="mailto:elemko@elemko.gr">elemko@elemko.gr</a>
SCALE	None		
ISSUANCE DATE	July 2021	SHEET 1 OF 1	

All dimensions in mm