


Description

Clamp, tested according to IEC EN 62561-1, Class "H" (Heavy duty), for use in air termination, down conductor and earthing system. The clamp is suitable for connecting tape conductors 20-40 mm & up to 6mm thickness. It is composed out of two plates with dimensions 70x70x4mm and one intermediate plate with dimensions 70x70x2 mm. The tightening is achieved by four screws M8x30 mm and four nuts M8.

Typical application



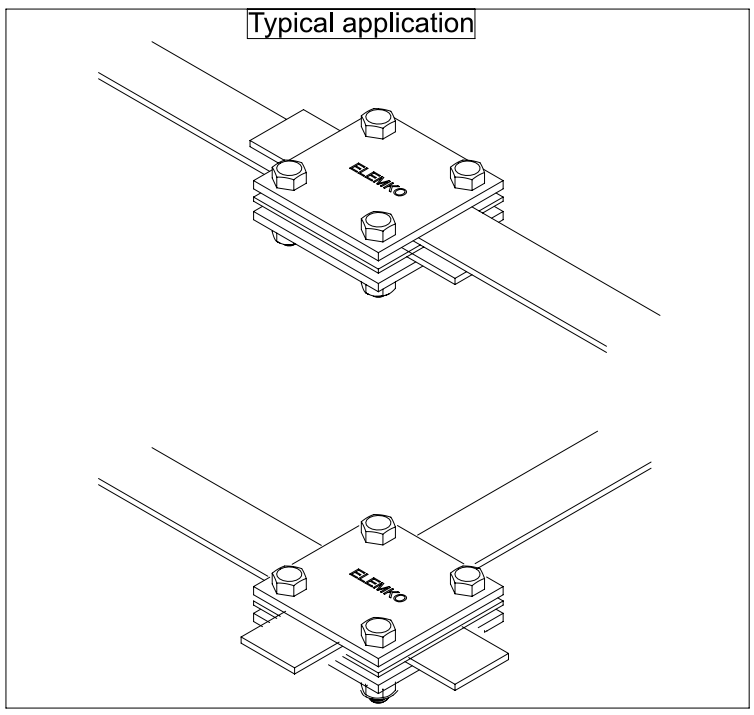

Description	Raw material	(WxT)*	Item code	Optional conductor (Tape)
Cross and 'T' connector	St/tZn (St/tZn screws)	40x6 / 40x6	62 04 040	64 01 143
	St/tZn (SSt/V2A screws)	40x6 / 40x6	62 04 041	64 01 143
	Cu (SSt/V2A screws)	40x6 / 40x6	62 24 040	64 20 403
	Cu/eSn (SSt/V2A screws)	40x6 / 40x6	62 24 041	64 22 403



Title:
Cross and 'T' connector

FIRST ISSUED	June 2016
DRAWN BY	Dionysopoulos G.
CHECKED BY	Kokkinos N.
APPROVED BY	Kokkinos N.
SCALE	None
ISSUANCE DATE	July 2021

Model
62 x4 04x

 www.elemko.gr
 elemko@elemko.gr

SHEET 1 OF 1

*Maximum dimensions
All dimensions in mm