


Description

Clamp, tested according to IEC EN 62561-1, Class "H" (Heavy duty), for use in air termination system, down conductor system and earthing system. The clamp is suitable for connecting tape conductors (20-30mm and up to 5mm thickness). The clamp is composed out of two plates with dimensions 60x60x4mm and one intermediate plate with dimensions 60x60x2mm. The tightening is achieved by four bolts M8x30mm and four nuts M8.

Typical application

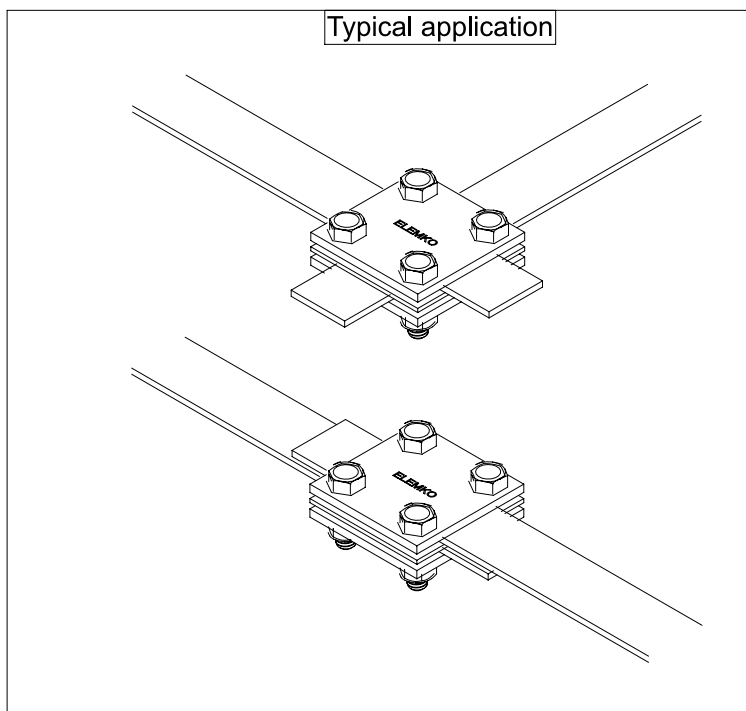

Description	Raw material	(WxT)	Item code	Optional conductor (Tape)
Cross and 'T' connector	St/tZn (St/tZn screws)	30x5 / 30x5	62 04 130	64 01 132
	St/tZn (SSt/V2A screws)	30x5 / 30x5	62 04 131	64 01 132
	Cu (SSt/V2A screws)	30x5 / 30x5	62 24 130	64 20 330
	Cu/eSn (SSt/V2A screws)	30x5 / 30x5	62 24 131	64 22 330
	SSt/V2A (SSt/V2A screws)	30x5 / 30x5	62 64 130	64 61 330



Title:

Cross and 'T' connector

FIRST ISSUED June 2016

DRAWN BY Dionysopoulos G.

CHECKED BY Kokkinos N.


APPROVED BY Kokkinos N.

SCALE None

ISSUANCE DATE July 2021

Model

62 x4 13x



All dimensions in mm

SHEET 1 OF 1