


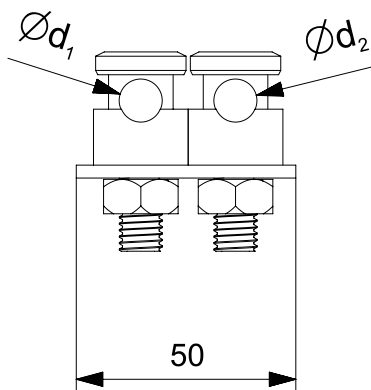

Description

Double bonding clamp, tested according IEC 62561-1, Class “H” (Heavy duty), for connecting solid round or stranded conductor to:


*Air termination rods

*Contraction – expansion absorbing component

*Earth lead in rods

The clamp consists of two special designed screw terminals M10x25mm, a metal body and two nuts M10

Typical applications

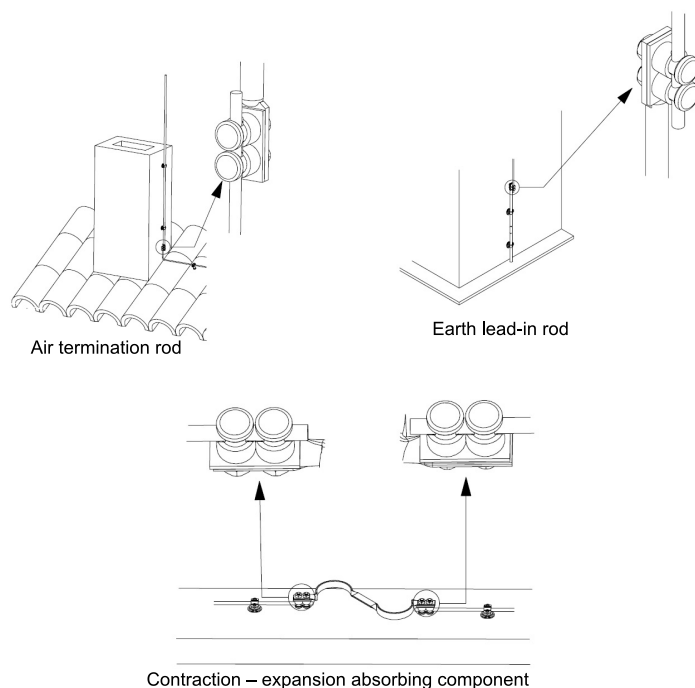

Description	Raw material		d_1 / d_2	Item code	Optional conductor (Round or stranded)
	Component	Screws			
Double bonding clamp	Al	St/tZn	8	62 42 241	64 40 008
Double bonding clamp	Al	St/tZn	10	62 45 240	64 00 011
Double bonding clamp	Cu	Cu-A	16 mm ² - 35 mm ²	62 25 242	64 20 135
Double bonding clamp	Cu	Cu-A	8mm - 50 mm ²	62 25 240	64 20 108
Double bonding clamp	Cu	Cu-A	10mm - 70 mm ²	62 25 244	64 20 170
Double bonding clamp	Cu/eSn	Cu-A/eSn	16 mm ² - 35 mm ²	62 25 243	64 20 135
Double bonding clamp	Cu/eSn	Cu-A/eSn	8mm - 50 mm ²	62 25 241	64 20 108
Double bonding clamp	Cu/eSn	Cu-A/eSn	10mm - 70 mm ²	62 25 245	64 20 170



Title:

Double bonding clamp

FIRST ISSUED June 2016

DRAWN BY Dionysopoulos G.

CHECKED BY Kokkinos D.


APPROVED BY Kokkinos D.

SCALE None

ISSUANCE DATE September 2021

Model

62 x5 24x



SHEET 1 OF 1

All dimensions in mm