

1

2

3

4

5


6

A


B

C

D

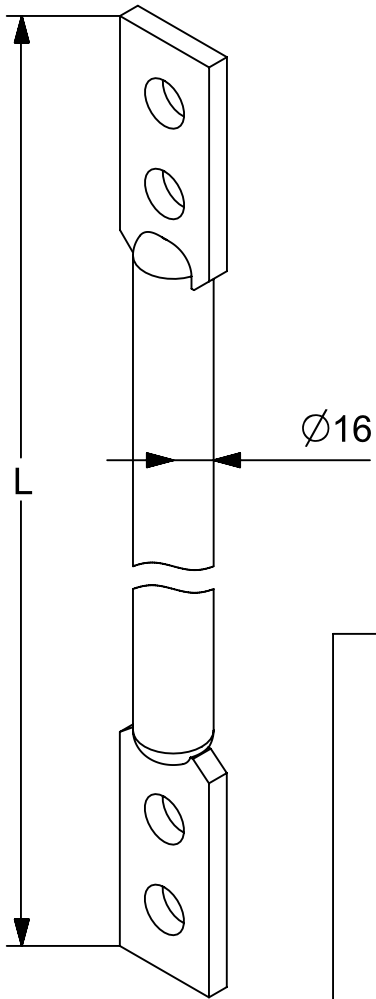

Typical application

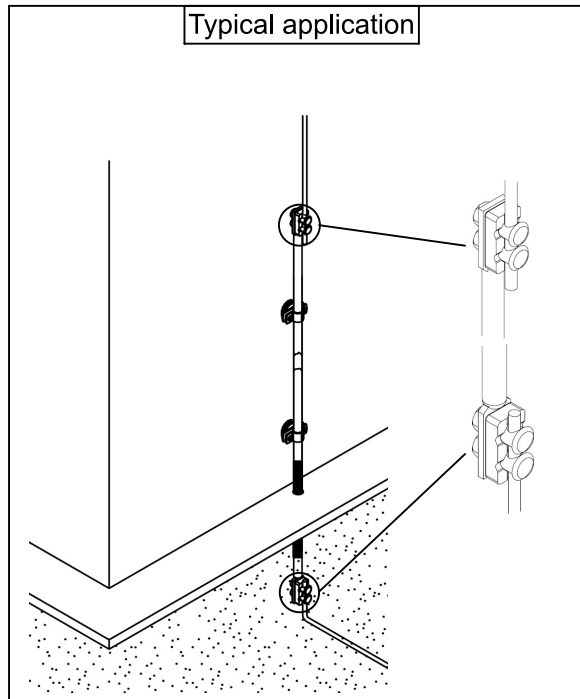

All dimensions in mm

1

2

3




4

5

A4

Description

Earth lead-in rod ELEMKO tested according to IEC 62561-2, Ø16mm. The earth lead-in rod is used as part of a down conductor in order to provide protection against mechanical stresses. The connection with the down conductor and earth electrode is achieved by double bonding clamps. Can be mounted on a perpendicular surface with two fasteners. Clamps and fasteners are not included.

Description	Raw material	L	Item code
Earth lead - in rods	St/tZn	1500	64 03 150
Earth lead - in rods	St/tZn	2000	64 03 200
Earth lead - in rods	St/tZn	2500	64 03 250
		Title:	
		Earth lead - in rods (2 points)	
FIRST ISSUED	June 2016	Model	
DRAWN BY	Dionysopoulos G.		
CHECKED BY	Kokkinos D.	64 03 xx0	
APPROVED BY	Kokkinos D.	 	
SCALE	None		
ISSUANCE DATE	February 2017	SHEET 1 OF 1	