

1

2

3

4

5

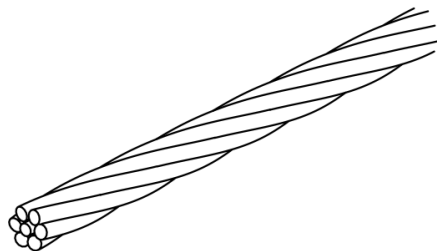
6

A

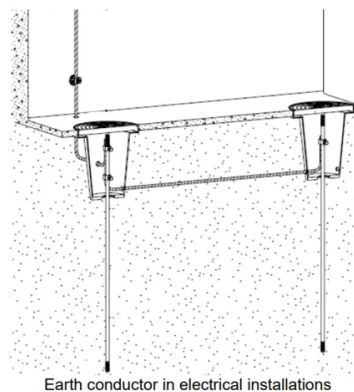
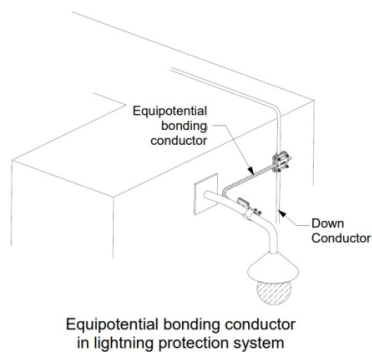
B

C

D

**Description**

Stranded conductor, tested according to IEC EN 62561 - 2 made out of electrolytic copper (Cu-E). It is used as earth termination conductor, down conductor, and earth conductor.

Typical application

All dimensions in mm

1



2

3

4

5

A4

Description	Raw material	mm ²	Item code	For use	
				Buried	Above ground
Stranded copper conductor	Cu/eSn	50	64 20 108	✓	✓
Stranded copper conductor	Cu/eSn	70	64 20 170	✓	✓
Stranded copper conductor	Cu/eSn	95	64 20 195	✓	✓
Stranded copper conductor	Cu/eSn	120	64 20 120	✓	✓
		Title: Stranded copper conductors			
FIRST ISSUED	June 2016	Model 64 20 1xx			
DRAWN BY	Dionysopoulos G.				
CHECKED BY	Kokkinos N.				
APPROVED BY	Kokkinos N.				
SCALE	None				
ISSUANCE DATE	September 2021	www.elemko.gr  elemko@elemko.gr			
		SHEET 1 OF 1			