

1

2

3

4

5


6

A


B

C

D

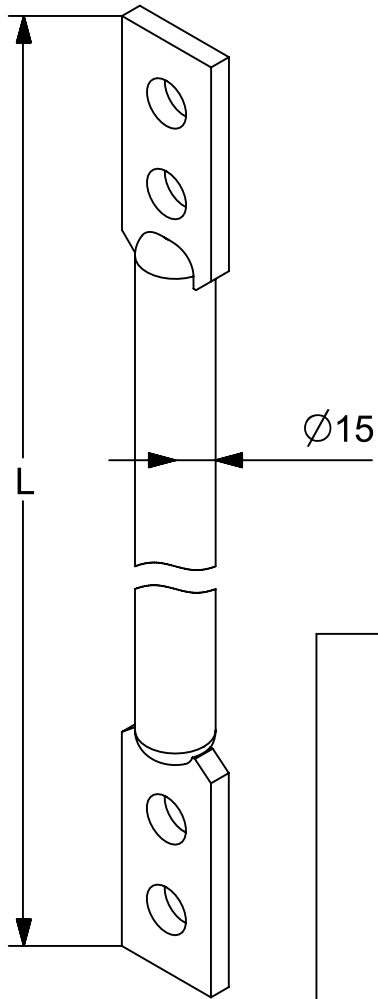

Typical application

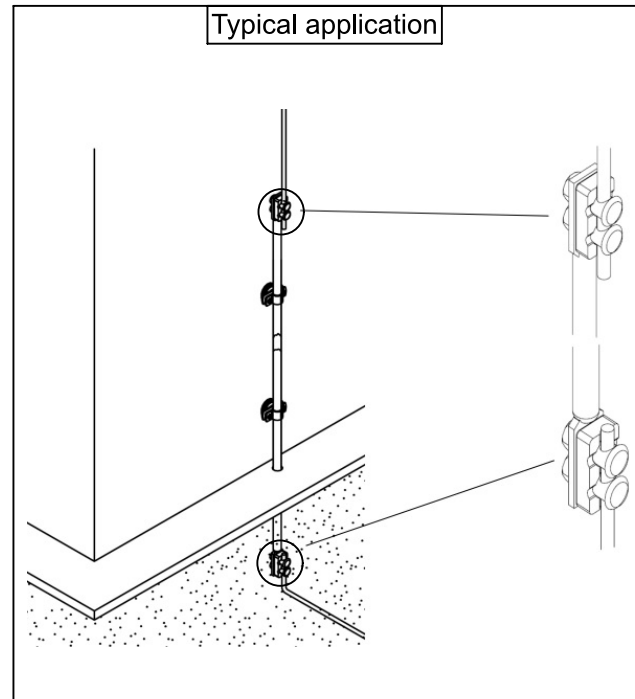

All dimensions in mm

1

2

3




4

5

A4

## Description

Earth lead-in rod ELEMKO tested according to IEC 62561-2, Ø15mm. The earth lead-in rod is used as part of a down conductor in order to provide protection against mechanical stresses. The connection with the down conductor and earth electrode is achieved by double bonding clamps. Can be mounted on a perpendicular surface with two fasteners. Clamps and fasteners are not included.

Description		Raw material	L	Item code
Earth lead - in rods		Cu	1500	64 23 515
Earth lead - in rods		Cu	2000	64 23 520
Earth lead - in rods		Cu	2500	64 23 525
		Title:		
		Earth lead - in rods ( 2 points )		
FIRST ISSUED	June 2016	Model		
DRAWN BY	Dionysopoulos G.			
CHECKED BY	Kokkinos D.	64 23 5xx		
APPROVED BY	Kokkinos D.			
SCALE	None			
ISSUANCE DATE	February 2017	SHEET 1 OF 1		