
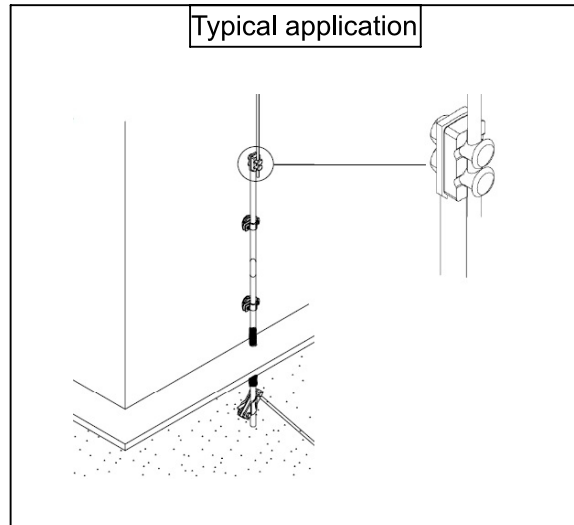



Description

Earth lead-in tested according to IEC 62561-2, Ø16mm. The earth lead-in rod is used as part of a down conductor in order to provide protection against mechanical stresses. The connection with the down conductor is achieved by a double bonding clamp. The connection with the earth electrode is achieved by a "T" and cross connection clamp. Can be mounted on a perpendicular surface with two fasteners. Clamps and fasteners are not included.

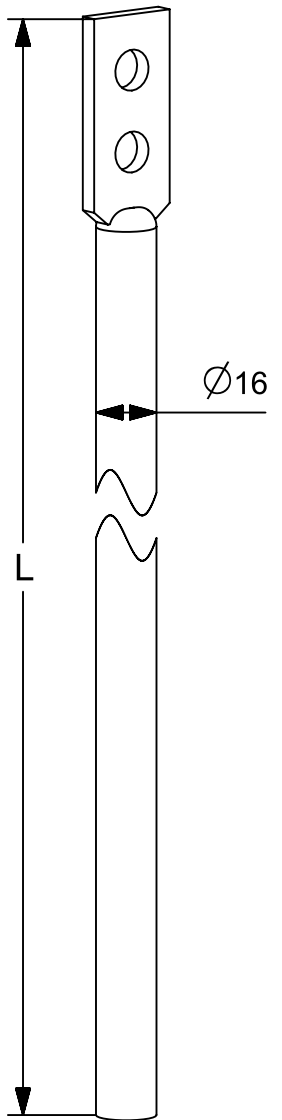

Description	Raw material	L	Item code
Earth lead - in rods	St/tZn	2000	64 02 200
Earth lead - in rods	St/tZn	2500	64 02 250
		Title : Earth lead - in rod (1 -point)	
		FIRST ISSUED	June 2016
DRAWN BY	Dionysopoulos G.	 elemko.gr  elemko@elemko.gr	
CHECKED BY	Kokkinos D.		
APPROVED BY	Kokkinos D.		
SCALE	None		
ISSUANCE DATE	September 2021		

All dimensions in mm