


Description

Equipotential earthing bar with one disconnecting link, tested according to IEC 62561-1 Class "H" (Heavy duty). It is made out of copper (Cu) tape 50x6mm. Each connection point is equipped with a Stainless steel (V2A) screw M10x35mm and 2 Stainless steel (V2A) nuts. The earth bar is fixed through glass reinforced polyester (GRP) insulators on steel profile zinc electroplated for wall mounting.

Typical application

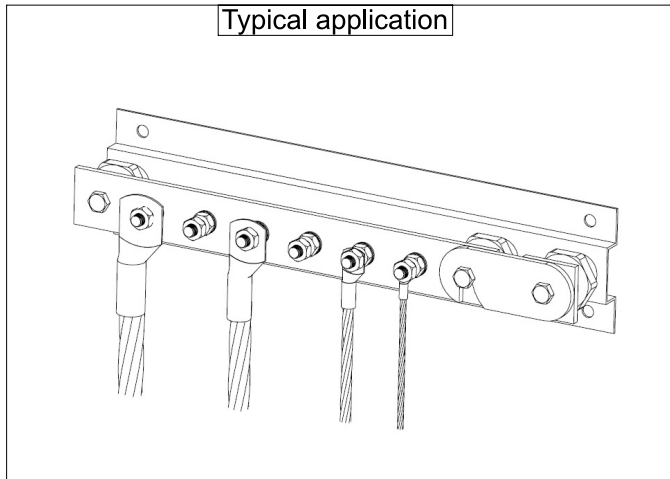

Description	Material	No. of insulators	L ₁	L ₂	Item code
Earth bar (6 ways)	Cu/St/eZn	3	400	475	66 56 106
Earth bar (8 ways)	Cu/St/eZn		500	575	66 56 108
Earth bar (10 ways)	Cu/St/eZn	4	650	725	66 56 110
Earth bar (12 ways)	Cu/St/eZn		700	775	66 56 112
Earth bar (14 ways)	Cu/St/eZn		850	925	66 56 114
Earth bar (16 ways)	Cu/St/eZn		950	1025	66 56 116
Earth bar (18 ways)	Cu/St/eZn	5	1050	1125	66 56 118
Earth bar (20 ways)	Cu/St/eZn		1200	1275	66 56 120
Earth bar (22 ways)	Cu/St/eZn		1300	1375	66 56 122
Earth bar (24 ways)	Cu/St/eZn		1400	1475	66 56 124
Earth bar (26 ways)	Cu/St/eZn	6	1500	1575	66 56 126
Earth bar (28 ways)	Cu/St/eZn		1650	1725	66 56 128



Title:

Earth bar with 1 disconnecting link

FIRST ISSUED May 2017

DRAWN BY Dionysopoulos G.

CHECKED BY Kokkinos D.


APPROVED BY Kokkinos D.

SCALE None

ISSUANCE DATE September 2021

Model

66 56 1xx



All dimensions in mm

SHEET 1 OF 1