

PRODUCT DATA SHEET

LIGHTNING PROTECTION AND EARTHING SYSTEM COMPONENTS

Code: 61 03 040

Description: Tape – conductor fastener with safety clip

ed.02/2021

Application


For vertical installation of tape conductor in earthing system, installed in a trench filled with soil or concrete.

Technical characteristics

Material	Hot dip galvanized steel (St/tZn)
Length	400 mm

Installation instructions

Tape's thickness	3 mm (side with indication "3") 4 mm (side with indication "4")
Spacing between fasteners	≤2000 mm
Driving length into the soil	Up to the notch
Conductor's fastening	By bending the appropriate safety clip
Can support conductors made of	Cu, Cu/eSn, SSt (Stainless Steel), St/tZn

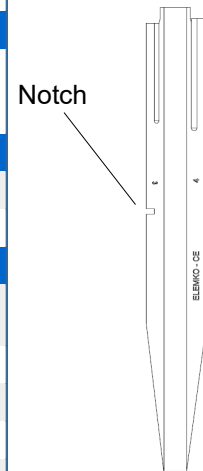

Manufacturing Quality Control


Manufacturing quality control according standard ISO 9001

Country of Origin


Greece

Unit: piece / Package: 100 pieces

Installation details

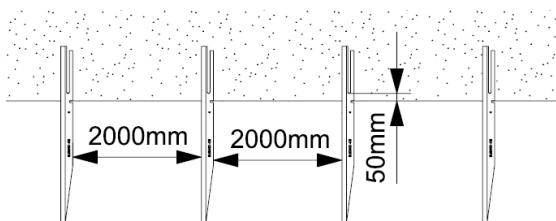


For flat surfaces drive the fasteners into the soil, up to the notch.

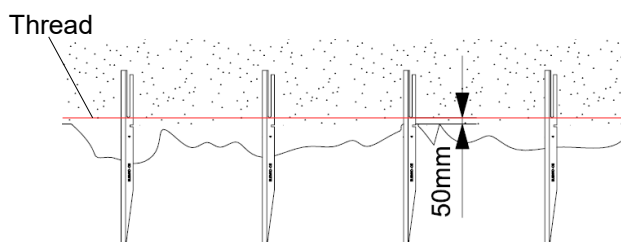

For uneven surfaces, with a variation up to 100 mm, install the first fastener at the higher point of the trench's bottom. Drive the first fastener into the soil, up to the notch. Use a thread in order to drive the tape receptacle of the other fasteners into the same level with the tape receptacle of the first fastener.

Completed installation

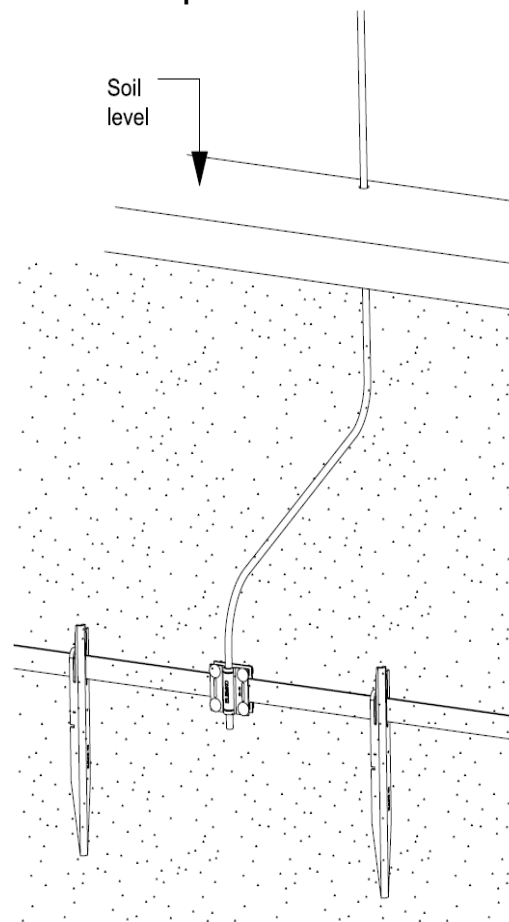

We reserve the right to introduce changes in the component due to technical evolution.