

## PRODUCT DATA SHEET

### LIGHTNING PROTECTION AND EARTHING SYSTEM COMPONENTS

**Code: 62 01 630**

ed.03/2021


**Description: St/tZn rod to tape conductor connector**

#### Application

Clamp, for connecting round rod to tape conductor. Used in air termination system, down conductor system, earthing system.

#### Classification as per IEC EN 62561

- Heavy duty (H – 100 kA)
- General use
- Intended to withstand a static mechanical load
- Non-permanent connection

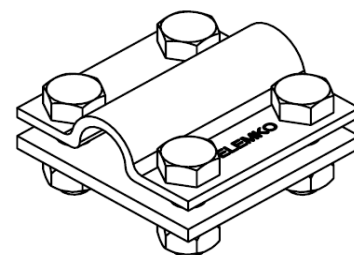

#### Technical characteristics

Material	Hot dip galvanized steel (St/tZn)
Description	Is consisted of two plates with dimensions 60x60 mm.
Bolts / nuts	M8x25 mm, St/tZn hexagon head bolts M8 St/tZn nuts

#### Installation instructions

Rod's dimensions	Ø16 mm
Tape's dimensions	20 – 30 mm & up to 5 mm thickness
Connection arrangements	Cross (B1) Parallel (B2)
Installation	Above ground, buried in ground, embedded in concrete
Can be connected above ground with	Al, Stainless Steel (SSt), St/tZn
Can be connected buried in ground with	Stainless Steel (SSt), St/tZn
Can be connected in concrete with	Cu, Cu/eSn, Stainless Steel (SSt), St/tZn
Tightening torque	13 Nm

#### Testing as per IEC EN 62561

The component has successfully passed the testing requirements of standard IEC EN 62561-1 "Lightning protection system components (LPSC) – Part 1 : Requirements for connection components".


Test report No **31906** by accredited laboratory as per ISO 17025

#### Manufacturing Quality Control

Manufacturing quality control according standard ISO 9001

#### Country of Origin

Greece

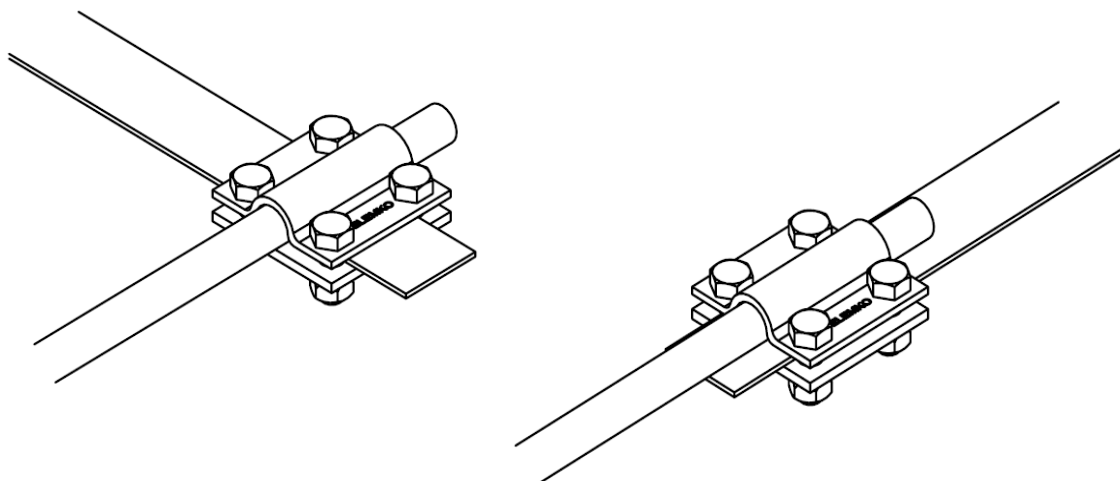**Unit: piece / Package: 20 pieces**


We reserve the right to introduce changes in the component due to technical evolution.