

PRODUCT DATA SHEET

LIGHTNING PROTECTION AND EARTHING SYSTEM COMPONENTS

Code: 62 04 130

ed.02/2021


Description: St/tZn tape conductor connector

Application

Clamp, for connecting tape conductors. Used in air termination system, down conductor system, earthing system.

Classification as per IEC EN 62561

- Heavy duty (H – 100 kA)
- Embedded in concrete
- Intended to withstand a static mechanical load
- Non-permanent connection

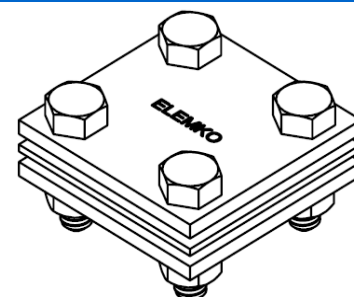

Technical characteristics

Material	Hot dip galvanized steel (St/tZn)
Description	Is consisted of two external plates with dimensions 60x60 mm and one intermediate plate.
Bolts / nuts	M8x30 mm, St/tZn hexagon head bolts M8 St/tZn nuts

Installation instructions

Tape's dimensions	20–30 mm & up to 5 mm thickness
Connection arrangements	Cross (B1) Parallel (B2)
Installation	Embedded in concrete
Can be connected with	Cu, Cu/eSn, Stainless Steel (SSt), St/tZn
Tightening torque	13 Nm

Testing as per IEC EN 62561

The component has successfully passed the testing requirements of standard IEC EN 62561-1 "Lightning protection system components (LPSC) – Part 1 : Requirements for connection components".


Test report No **30680** accredited laboratory as per ISO 17025

Manufacturing Quality Control

Manufacturing quality control according standard ISO 9001

Country of Origin

Greece

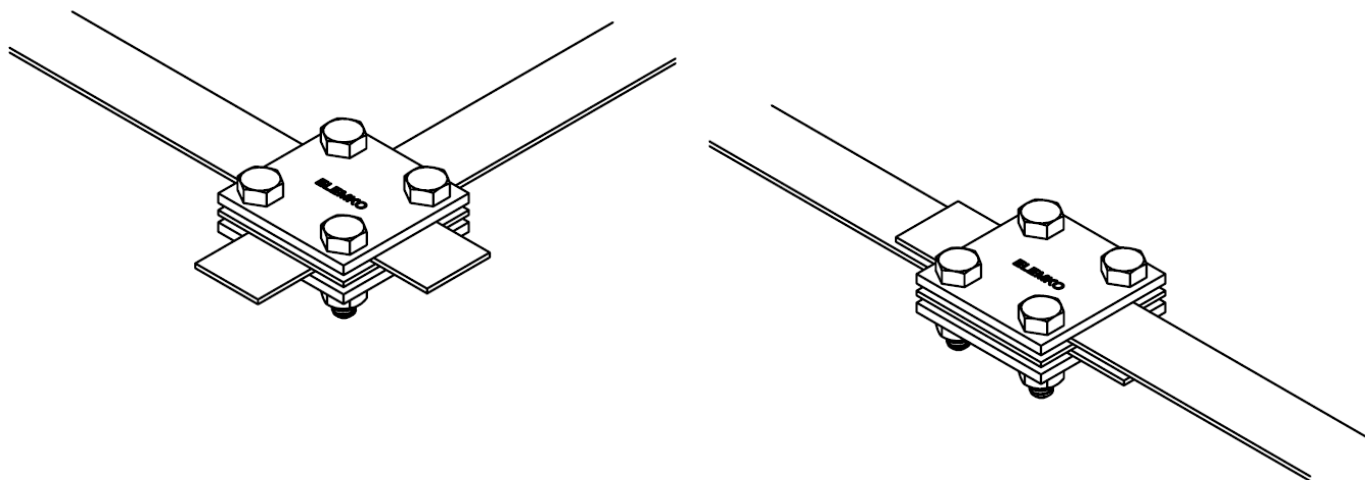Unit: piece / Package: 20 pieces


We reserve the right to introduce changes in the component due to technical evolution.