

PRODUCT DATA SHEET

LIGHTNING PROTECTION AND EARTHING SYSTEM COMPONENTS

Code: 65 22 007 ed.03/2021

Description: Press terminal for stranded conductor

Application

Tin plated copper press terminal for stranded conductor.

Classification

- · General use
- · Permanent connection



Technical characteristics	
Material	Tin plated copper (Cu/eSn)
Installation instructions	
Conductor's dimensions	6 mm² (4 mm² flexible braid)
Hole diameter	6,5 mm
Connections arrangements	"T" Parallel
Installation	Above ground, buried in ground,
Can be connected above ground with	Al, Cu, Cu/eSn, Stainless Steel (SSt), St/tZn

Cu, Cu/eSn, Stainless Steel (SSt)

Manufacturing Quality Control


Manufacturing quality control according standard ISO 9001

Country of Origin

Greece

Unit: piece / Package: 100 pieces

Can be connected buried in ground with

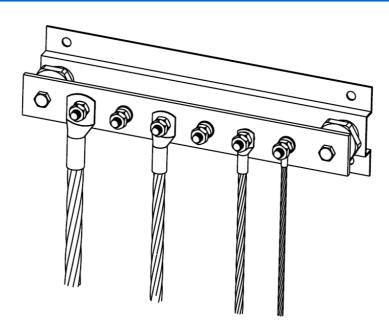

We reserve the right to introduce changes in the component due to technical evolution.



