

PRODUCT DATA SHEET

Earthing components

Pipe clamps

Lightning protection systems


Pipe clamps

Code: 6502400-71

Description: Pipe clamp two points connection, code: 6502400

Application

Pipe clamp with two conductor connection points. Used in air termination system, down conductor system, equipotential bonding. The connection to the conductor is achieved through additional clamps (not included). For copper conductor is needed additionally a bimetallic contact (not included) in order to avoid any electrochemical corrosion.

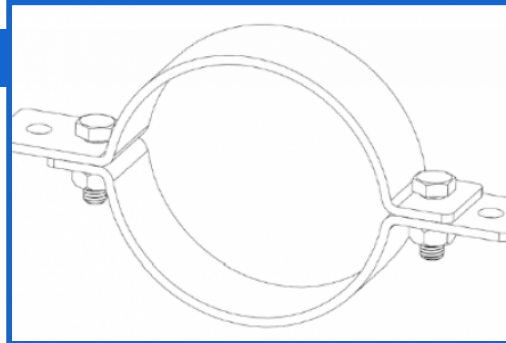

Κατηγοριοποίηση σύμφωνα με το πρότυπο ΕΛΟΤ ΙΕC EN 62561-1

- Heavy duty (H - 100 kA)
- General use
- Intended to withstand a static mechanical load
- Non-permanent connection

Technical characteristics -- Installation instructions

Material	Hot dip galvanized steel (St/tZn)
Bolts / nuts	M10x30 mm, St/tZn hexagon head bolts, M10 St/tZn nuts
Pipe's diameter (mm / inch)	Ø112-123 / 4"
Connection arrangements	Parallel (B7), "T" (B8)
Installation	Above ground, buried in ground
Can be connected above ground with	Pipes made from Al, Stainless Steel (SSt), St/tZn & conductors made from Al, Stainless Steel (SSt), St/tZn, Cu/eSn and through bimetallic contact with Cu or St/eCu.

Can be connected buried in ground with Pipes and conductors made from stainless Steel (SSt) or St/tZn

Tightening torque 17 Nm

Connection to conductors Through clamps (not included)

Testing as per IEC EN 62561

The component has successfully passed the testing requirements of standard IEC EN 62561-1 "Lightning protection system components (LPSC) - Part 1 : Requirements for connection components".

Test report No **30613** by accredited laboratory as per ISO 17025

Manufacturing Quality Control

Manufacturing quality control according standard ISO 9001

Country of Origin

Greece

Optional accessories

Bimetallic contact , ELEMKO code 6510105

Unit: piece / Package: 25 pieces