

PRODUCT DATA SHEET

Lightning protection systems


Non isolated LPS

Code: 6440510-71

Description: Al air termination rod Ø15x1000 mm, Code: 6440510

Application

Aluminium alloy rod used as air termination rod at horizontal surfaces.

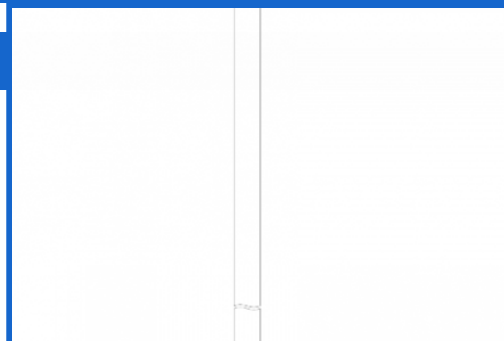

Technical characteristics -- Installation instructions

Diameter	15 mm
Length	1000 mm
Material	Aluminium alloy (Al)
Electrical resistivity	$\leq 0,036 \mu\Omega\text{m}$
Tensile strength 120 - 280 N/mm ²	
Installation location	Outdoor
Can be connected with	Al, Stainless Steel (SSt), St/tZn
Installation	It is based on concrete mounting base and supported by suitable isolating fastener (see needed accessories).
Connection to conductor	By clamp

Testing as per IEC EN 62561

The component has successfully passed the testing requirements of standard IEC EN 62561-2 "Lightning protection system components (LPSC) – Part 2 : Requirements for conductors and earth electrodes".

Test report No **31489** by accredited laboratory as per ISO 17025

Manufacturing Quality Control

Manufacturing quality control according standard ISO 9001

Country of Origin

Greece

Needed accessories1)

Concrete mounting base, ELEMKO code 6130300

Clamp, e.g ELEMKO code 6201611

Isolating fastener, ELEMKO code 6176XXX or 6177XXX

Unit: piece / Package: 1 piece